

14,000 lb
GVWR Rating

Toolbox
Formed Diamond
Plate Steel Toolbox

Coupler
2 5/16" Adjustable Coupler

Tongue
I-Beam Tongue
with Toolbox

Jack
1 - 10K Drop-Leg Jack

Frame
8" x 10LB I-Beam Frame

Floor
2" x 8" Treated
Wood Floor

Sides
6" Channel Outer Frame

Wheels
16" Black Mod Wheels

Tires
ST235/80R16 (E) Radial Tires

Crossmembers
3" Channel on 16" Centers

Axle(s)
2 - 7K Dexter
Electric Brake Axles

Tilt Deck
20' Tilt Deck On All Lengths

Tail
Full Width Knife Edge Tail




*Trailer may be shown with optional and/or outdated features.

Sizes (20' tilt deck on all lengths)

24' X 96"	26' X 96"	28' X 96"	30' X 96"
24' X 102"	26' X 102"	28' X 102"	30' X 102"

Color Options

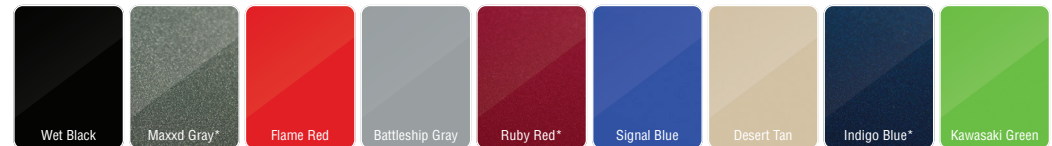

* Metallic. | The colors shown are for your reference only. Actual colors may vary.

Standard Options

Dual Side Steps
For easy access to trailer deck from both driver and passenger sides.

Gravity Tilt
20' gravity tilt bed dampened by a hydraulic cylinder for smooth and ease of use.

4 Bull-Nose D-Rings
10,000 lb rated high tempered solid steel 3/4" x 4-1/2" D-Rings.

Adjustable Coupler
2 5/16" coupler easily adjustable for desired height.