

14,000 lb
GVWR Rating

Tail
Straight Deck with
5' Slide-In Ramps

Wheels
16" Black Mod Wheels

Tires
ST235/80R16 (E) Radial Tires

Axle(s)
2-7K Dexter Electric Brake Axles

Floor
2" x 8" Treated Wood Floor

Sides
Stake Pockets and Rubrail

Frame
6" Channel Frame

Lights
NATM and DOT Compliant
Flushmount LED Lights

D-Rings
4 - 5/8" Bull-Nose D-Rings

Fenders
Drive-Over Diamond
Plate Fenders

Crossmembers
3" Channel on 16" Centers

Tongue
6" Channel Wrap Tongue

Gooseneck Option Features

- 2-10K Spring Loaded Drop Leg Jacks
- Front Full Width Diamond Plate Toolbox Between Risers
- 2-5/16" 30K Round Gooseneck Coupler
- 10" I-Beam Neck & Risers

Spare Mount
Spare Tire Mount

Jack
1 - 10K Drop-Leg Jack


Coupler
2 5/16" Adjustable
Coupler

Wiring
7-Way Plug with
Sealed Wiring Harness

Sizes

16' x 102"	18' x 102"	20' x 102"	22' x 102"
24' x 102"			


Color Options

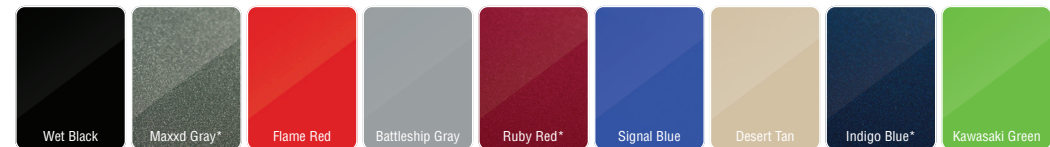

* Metallic. | The colors shown are for your reference only. Actual colors may vary.

* Trailer may be shown with optional and/or outdated features.

Standard Options

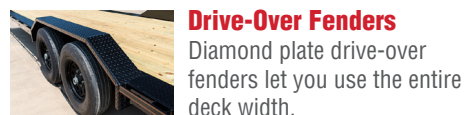

Drive-Over Fenders

Diamond plate drive-over fenders let you use the entire deck width.



102" Deck Width

Full 102" deck width allow you to load wide vehicles such as rock crawlers.



Stabilizer Jacks

2 - 5K jacks for added stability when loading. (Standard only on 20' and longer)



Spare Tire Mount

Standard spare tire mount allows easy installation of optional spare tire/wheel.