



# TSX FLATBED TILT WITH SINGLES

**14,000 lb**  
GVWR Rating

**Spare Tire Holder**  
Spare Tire Holder in Neck

**Neck & Risers**  
12" x 14lb I-Beam  
Neck and Risers

**Tilt Deck**  
I-Beam Tilt Deck Frame With Scissor Hoist

**Crossmembers**  
3" Channel on 16" Centers

**Outer Frame**  
6" Channel Outer Frame

**Coupler**  
2 5/16" 30K Round  
Gooseneck Coupler

**Toolbox**  
Front Full Width  
Diamond Plate Toolbox

**Jack(s)**  
2 - 10K Drop-Leg Jacks

**Toolbox**  
Formed Toolbox with  
Power Up & Power Down  
and a KTI Hydraulic Pump

**Main Frame**  
12" x 14lb I-Beam Frame

**Wheels**  
16" Black Mod Wheels

**Tires**  
ST235/80R16 (E) Radial Tires

**Axle(s)**  
2 - 7K Dexter Electric Brake Axles

**Floor**  
2" x 8" Treated Wood Floor

**Tail**  
Full Width Knife Edge Rear



## Sizes

26' X 102"

28' X 102"


30' X 102"

32' X 102"

34' X 102"

## Color Options

\*Trailer may be shown with optional and/or outdated features.

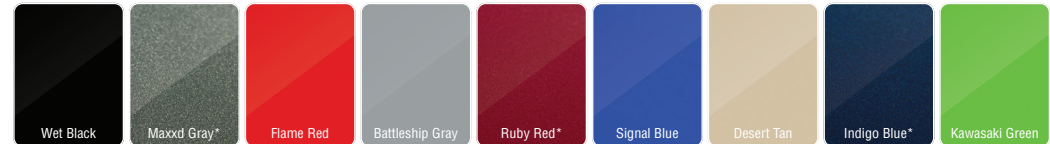

\* Metallic. | The colors shown are for your reference only. Actual colors may vary.

## Standard Options

12° Deck Tilt Angle

**Deck Tilt Angle**  
12° degree bed angle with  
a 17° degree approach angle  
for the first 4 feet.



**Scissor Hoist**  
More stable and power-  
ful hoist to control the  
tilt bed.



**I-Beam Tilt Deck Frame**  
Sturdier and stronger than  
a standard channel tilt bed  
frame.



**Knife Edge Rear**  
Makes it easy to get onto the  
trailer with small wheeled  
equipment.